




Floodlights

BAT85 Series Explosion-proof Floodlights

- ◆ Explosion protection to
 - CENELEC
 - IEC
 - NEC
- ◆ Can be used in
 - Zone 1 and Zone 2
 - Zone 21 and Zone 22
 - Class I, Zone 1 and Zone 2
 - Class I, Division 1, Groups A, B, C, D
- ◆ Enclosure in copper-free aluminium, powder coated surface, yellow (RAL1021).
- ◆ Integral control gear, easy installation and maintenance.
- ◆ Toughened glass cover resistant to temperature changes.
- ◆ The light fittings are supplied without lamp. PHILIPS lamps are recommended.
- ◆ Both American standard and European standard are available.

Catalogue number logic

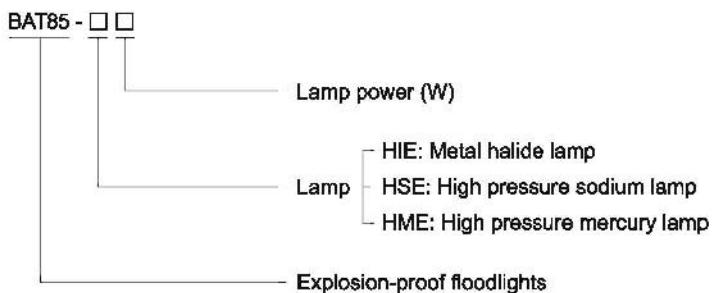

Photometric data

Photometric data of 250W metal halide lamp

Rated luminous flux: 23000lm;

The data from PHILIPS lamp;

Luminous intensity distribution cd/1000lm

175W Metal halide lamp*0.61

150W High pressure sodium lamp*0.78

250W High pressure sodium lamp*1.22


175W High pressure mercury lamp*0.36

250W High pressure mercury lamp*0.55

400W Metal halide lamp*1.40

400W High pressure sodium lamp*2.36

400W High pressure mercury lamp*0.82

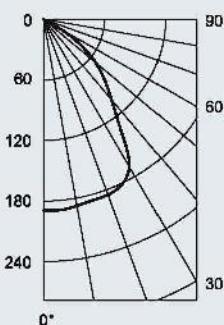

| Angle | CP | Angle | CP |
|-------|------|-------|------|
| 0 | 4066 | 50 | 1112 |
| 5 | 3773 | 55 | 945 |
| 10 | 3538 | 60 | 404 |
| 15 | 3385 | 65 | 292 |
| 20 | 3340 | 70 | 161 |
| 25 | 3292 | 75 | 90 |
| 30 | 3036 | 80 | 46 |
| 35 | 2475 | 85 | 0 |
| 40 | 1763 | 90 | 0 |
| 45 | 1404 | | |

We can provide lighting design and data by professional lighting software DIALUX based upon simulated site situation on request.

Zones 1&2; 21&22

Technical data**Explosion-proof floodlights****BAT85-□□****Explosion protection**

Gas explosion protection
Dust explosion protection

 II 2 G Ex d IIC T3^a or $\text{xx}^{\circ}\text{C}$ Gb

Ex d IIC T3^a or $\text{xx}^{\circ}\text{C}$ Gb

 II 2 D Ex tb IIIC T190^a or $\text{xx}^{\circ}\text{C}$ Db IP65

Ex t IIIC T190^a or $\text{xx}^{\circ}\text{C}$ Db IP65

^a See Selection Table for temperature classification

Certificates

Conformity to standards

LCIE 10 ATEX 3083; IECEx CQM 11.0013; FM (USA)

EN 60079-0: 2009, EN 60079-1: 2007, EN 60079-31: 2009

IEC 60079-0: 2007, IEC 60079-1: 2007, IEC 60079-31: 2008

Material

Enclosure

Copper-free aluminium, powder coated surface, yellow (RAL1021)

Glass cover

Toughened glass, stands 4J impact

Ballast

Choke ballast, rapid starting, stable performance

Trigger

General trigger

Capacitor

Power factor ≥ 0.90 (compensated)

Internal reflector

High-purity aluminium

Exposed fastener

Stainless steel

Lamp

Lamp holder

E40

Available lamp

Metal halide lamp (HIE): 175W, 250W, 400W

High pressure sodium lamp (HSE): 150W, 250W, 400W

High pressure mercury lamp (HME): 175W, 250W, 400W

Rated voltage

European standard: 120V, 208V, 220~240V, 250V, 277V AC 50Hz (60Hz is optional)

American standard: 120V, 208V, 240V, 277V AC 60Hz (50Hz is optional)

Earthing protection

M5 (internal & external earth bolts)

Degree of protection

IP65

Ambient temperature

-20°C~+55°C

Terminal

3 x 1.5~2.5mm² (L+N+PE)

Cable entries

2 x M25 x 1.5 plug

Cable gland (optional)

DQM-II (Ex d) or DQM-III (Ex d) is recommended. Please see P7/20~25.

Weight

European standard: 28.50kg

American standard: 31.40kg

**Selection Table**

Dimension drawings (all dimensions in mm) - subject to alteration

| Rated voltage | Lamp | Lamp power (W) | Temperature classification | | | |
|------------------------|------|----------------|----------------------------|-------|--------------------|-------|
| | | | -20°C ≤ Ta ≤ +40°C | | -20°C ≤ Ta ≤ +55°C | |
| | | | Gas | Dust | Gas | Dust |
| 120V AC 50/60Hz | HIE | 175, 250, 400 | T3 | 190°C | T3 | 190°C |
| | HSE | 150, 250, 400 | T3 | 190°C | T3 | 190°C |
| 208/220V AC 50/60Hz | HIE | 175, 250, 400 | T3 | 190°C | T3 | 190°C |
| | HME | 175, 250, 400 | T3 | 190°C | T3 | 190°C |
| | HSE | 150, 250, 400 | T3 | 190°C | T3 | 190°C |
| 230V AC 50/60Hz | HIE | 175, 250, 400 | T3 | 190°C | T3 | 190°C |
| | HME | 175, 250 | T3 | 190°C | T3 | 190°C |
| | HME | 400 | T3 | 190°C | 208°C | 208°C |
| | HSE | 150, 250 | T3 | 190°C | T3 | 190°C |
| | HSE | 400 | T3 | 190°C | 206°C | 206°C |
| 240V AC 50/60Hz | HIE | 175, 250, 400 | T3 | 190°C | T3 | 190°C |
| | HME | 175, 250 | T3 | 190°C | T3 | 190°C |
| | HME | 400 | T3 | 190°C | 211°C | 211°C |
| | HSE | 150, 250 | T3 | 190°C | T3 | 190°C |
| | HSE | 400 | T3 | 190°C | 212°C | 212°C |
| 250V AC 50/60Hz | HIE | 175, 250, 400 | T3 | 190°C | T3 | 190°C |
| | HME | 175, 250 | T3 | 190°C | T3 | 190°C |
| | HME | 400 | 201°C | 201°C | 216°C | 216°C |
| | HSE | 150, 250 | T3 | 190°C | T3 | 190°C |
| | HSE | 400 | 211°C | 211°C | 226°C | 226°C |
| 277V AC 50/60Hz | HIE | 175, 250 | T3 | 190°C | T3 | 190°C |
| | HIE | 400 | T3 | 190°C | 208°C | 208°C |
| | HME | 175, 250 | T3 | 190°C | T3 | 190°C |
| | HME | 150, 250 | T3 | 190°C | T3 | 190°C |
| | HSE | 400 | 210°C | 210°C | 225°C | 225°C |

